

SC-RD




MAQUINAS Y CONSUMIBLES PARA CAMPOS DE TIRO SL	
Autor	MYC para Campos de Tiro SL
Versión	V1.0
Idioma	ENGLISH
Fecha	Julio 2023

1 GENERAL DESCRIPTION

The SC-LO-RD is a chip card reader that, connected to a control unit, allows credit to be downloaded in normal mode or in continuous download mode.

2 MAIN PARTS

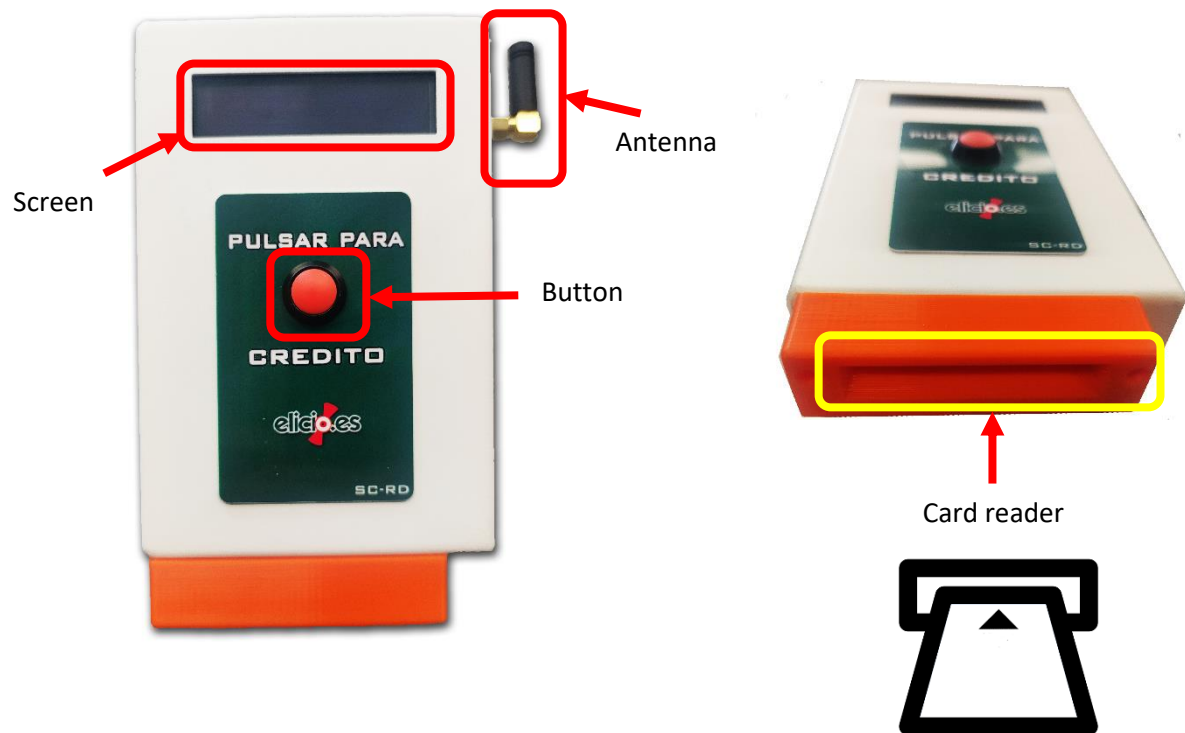

3 CONFIGURATION

First, **connect the SC device to the control unit**. Compatible with EP-ELI-02 and EP095M. Ask for other models of control units.

Once connected to the control unit, the message "INSERTE TARJETA" will be displayed on the screen. To access the settings menú insert the MASTER CARD

Once the MASTER CARD has been read and identified correctly, **without removing the card**, press the button with a long pulse and it will show the different options. With a short pulse we can browse the menu

- **SERIES TOTALES:** Shows the total number of series launched. To set the counter to zero press the button with a long pulse
- **NUMERO DE DISPOSITIVO:** To number the different devices and to differentiate them. Long pulse to change the numbering.
- **MODO CONTINUO:** When enabled (SI) allows **continuous credit discharge without the need to withdraw the card** or press the button.

- **PRECIO:** It shows the prices of the different categories recorded in the MASTER CARD.
It does not allow to modify them
- **AJUSTAR HORA:** Long pulse to set date and time if needed

Once the adjustments have been made, we can remove the MASTER CARD and configure the control unit in COIN READER.

- **CONTINUO:** for continuous download without removing the card (Only for EP-ELI-02. Other control units, ask)
- **SI:** for normal download. Press the button and withdraw the card for each credit download

4 CONNECTION DIAGRAMS

To **EP-ELI-02** control unit



8 pins connector for EP-ELI-02

1	Active coin reader (-)	White
2	RX	Green
3	TX	Yellow
4	Coin (-)	Pink
5		
6		
7	12V	Red / Brown
⊕	(-)	Blue / Grey



(+) **Red / Brown**

(-) **Blue / Grey**

B7 **White**

S1 **Pink**

N/C **Green / Yellow**

To EP095M control unit



DB15 pins connector for Progetti



Connector	Board
Pin 1	B1
Pin 2	B2
Pin 3	B3
Pin 4	B4
Pin 5	B5
Pin 6	B6
Pin 7	B7
Pin 8	S1
Pin 11	(-)
Pin 15	(+)

Pins 9 – 10 – 12 – 13 – 14 Not Connected

5 SAFETY

The staff handling the remote control and the shooters must be in the security zone.



Any maintenance operation must be carried out by **qualified personnel**.



Do not manipulate any part of the controller (electronic board, battery, ...).



Mandatory use of **safety goggles and hearing protection** to exercise shooting.